



# Missing Topics Fixer

Copyright 2015, HelpEssentials. All rights reserved.

No part of this document may be reproduced, transmitted in any form or by any means without the prior written permission of HelpEssentials.

[www.helpessentials.com](http://www.helpessentials.com)



## Table of Contents

---

### **Missing Topics Fixer .....3**

Disclaimer.....3

### **Using the Script .....4**

Import the script into RoboHelp.....4

Use the script .....5



## Missing Topics Fixer

---

Thank you for downloading the Missing Topics fixer script. With this script you can automatically rebuild a RoboHelp project's FPJ files, restoring all missing topics.

If you have any issues running this script, don't hesitate to [contact us](#).

### Disclaimer

---

This script will modify the project files of RoboHelp. Make a backup of your project before using this script.

We are not liable for any lost files or any other damage that may result because you use this script.

## Using the Script


---


### Import the script into RoboHelp


---

To use the script, you must first import the script into RoboHelp:

1. Open the RoboHelp project that you want to clean.
2. Open the Script Explorer. You open the Script Explorer by clicking View > Pods > Script Explorer.
3. In the Script Explorer, click on the blank space below the scripts so that no script or directory is selected.

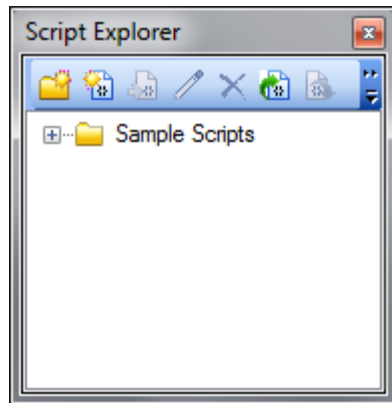

4. Click the **Import Script files** (  ).
5. In the file picker, select the *fpjFixer.jsx* file and click **Open**.

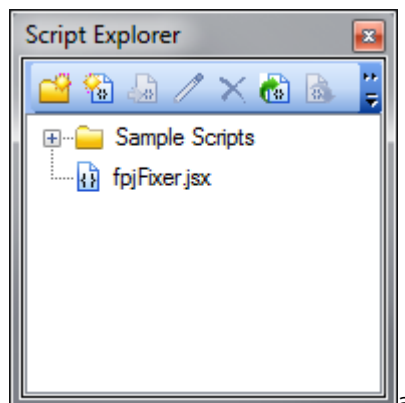


The script is now imported into RoboHelp.


## Use the script


---

**Note:** Always make a backup before running this script. This script will modify RoboHelp's project files.


1. Open a RoboHelp project. It doesn't matter which one.
2. Open the Script Explorer. You open the Script Explorer by clicking View > Pods > Script Explorer.

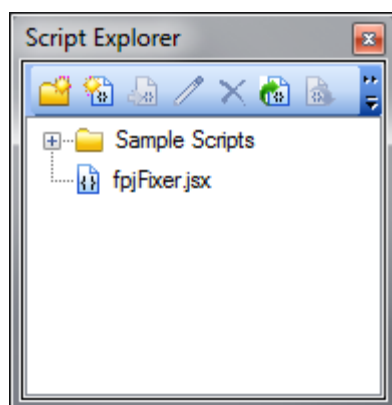


3. Select the fpjFixer script and click **Run Selected Script File** (  )

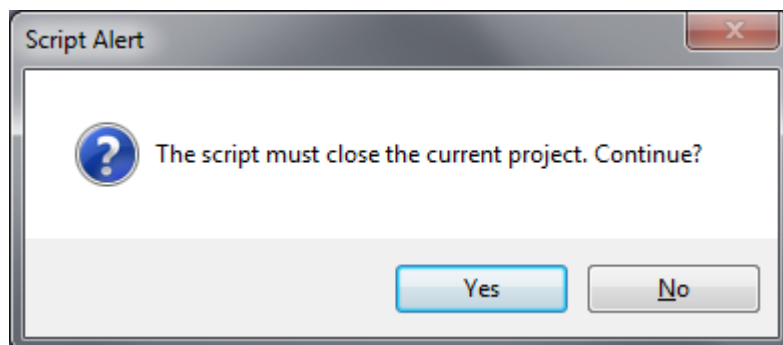

4. When the script asks to close the opened project, choose **Yes**.

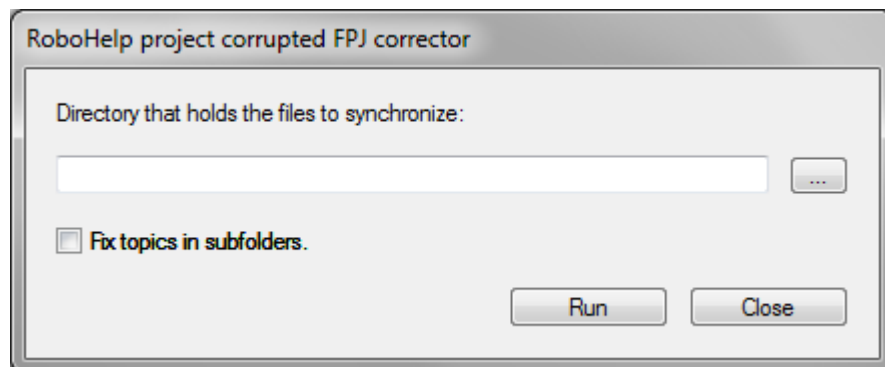

5. In the field *Directory that holds the files to synchronize*, insert the full path of the location you want to restore. Click the button after the field to choose the correct directory.
6. If you also want to restore the subfolders of the chosen folders, select *Fix topics in subfolders*.
7. Click **Run**.

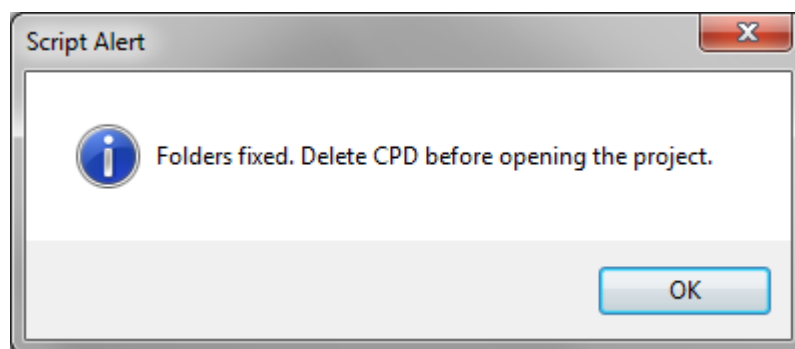

8. Click **OK** in the dialog.
9. Repeat step 5 to 8 for every folder you want to fix.
10. If necessary, remove the CPD files for every project you restored.